

Typical Features

- ◆ Ultra Wide input voltage range 200-1200VDC (6:1)
- ◆ Against reverse protection, output over-voltage protection, short circuit protection
- ◆ No load input current as low as 1.0mA
- ◆ Input output isolation: 4000VDC
- ◆ Transfer efficiency up to 85%
- ◆ Widely used in photovoltaic power generation, high-voltage inverter
- ◆ Operating Temperature: -30℃~ +70℃
- ◆ Industrial design, international standard case



Application Field

BK20-600SXXH1N4 series -- are regulated output DC/DC converters offered by Aipu. It features ultra-high voltage input of 200-1200VDC , high efficiency and high reliability. It can be widely used in photovoltaic power generation, high-voltage inverter and so on, which provide stable operating voltage to the equipment and improve the power and the load's safety performance with multiple protection when working under abnormal conditions.

Typical Product List

Model	Power (W)	Input Current (Input Nominal)		Output Voltage/Current		Output Efficiency	Max. Capacitive Load
		Output no load	Output full load	Voltage	Current	(Input Nominal) %/TYP	(u F)
		(mA)		(V)	(mA)		
*BK20-600S05H1N4	20	0.47	41.7	5	4000	80	3000
BK20-600S12H1N4		0.50	40.6	12	1667	82	2000
BK20-600S15H1N4		0.53	39.4	15	1334	84	1000
BK20-600S24H1N4		0.56	37.9	24	834	85	470

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2: "*" is model under developing.

Note 3: The typical output efficiency is based on that product is full loaded and burned-in after half an hour.

Note 4: The fluctuation range of full load efficiency(% ,TYP) is $\pm 2\%$, full load output efficiency= total output power/module's input power.

Note 5: When the product input is 300-1200VDC, it is necessary to connect a current limiting resistor (370Ω/10W, metal oxide film) in series to the input end of the module to suppress the surge current.

Please refer to the following peripheral recommended circuit for the specific connection method.

Input Specification

Item	Operating Condition	Min.	Typ.	Max.	Unit
Input Voltage Range	--	200	600	1200	VDC
		Please refer to the Input Voltage Dearth Curve at back			

Item	Operating Condition	Min.	Typ.	Max.	Unit
Input Current	200VDC@100% load	--	120	--	mA
	600VDC@100% load	--	42	--	
	1200VDC@100% load	--	22	--	
Stand-by Consumption	Output no load, nominal input	--	--	0.4	W
Input filtering	II filter				

Output Specification

Item	Operating Condition	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	0%~100% load	--	±2.0	±3.0	%
Minimum Load	--	10	--	--	
Line Regulation	Input full load range	--	±0.5	±1.2	
Load Regulation	20%~100% nominal load, balance load	--	±1.0	±2.0	
Ripple & Noise	20MHz bandwidth (peak peak value)	--	200	250	mV
Temperature Coefficient	--	--	--	±0.05	%
Turn-on delay time	200VDC	--	5000	--	mS
	600VDC	--	2000	--	
	1200VDC	--	1500	--	
Power off Holding time	1200VDC	--	10	--	
Turn on overshoot	0%~100% load	--	10	--	%
Output overcurrent protection	Input full voltage range	130	200	--	
Dynamic Response Overshoot Range	25%-50%-25%	--	±5.0	±6.0	
Dynamic Response recovery time	50%-75%-50%	--	300	500	mS
Short circuit protection	Input 300-900VDC	Output continuous short circuit protection, after circuit failure is relieved, self-recovery			

General Specification


Item	Operating Condition	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, test for one minute Leakage current ≤5mA	4000	--	--	VDC
Operating Temperature	--	-30	--	+70	℃
	Refer to Temperature Derating Curve, details see the Product Character Curve at back				
Storage Temperature	--	-25	--	+85	
Soldering	Wave-soldering	260±5℃，time: 5-10S			

Temperature	Manual-welding	380±10℃, time: 4-10S			
Switching Frequency	--	--	65	70	KHz
Max. Case Temperature	Within operating Curve	--	--	+100	℃
Shortage Humidity	No condensing	--	--	95	%RH
Insulation Resistance	Input-Output	--	--	500	VDC
		--	--	100	MΩ

Physical Specifications

Case Material		Black Aluminum Case
Package Dimensions	Horizontal package	70.0X48.0X23.5mm
Product Weight		155g（TYP）
Cooling Method		Free Air Convection


Typical Application Circuit

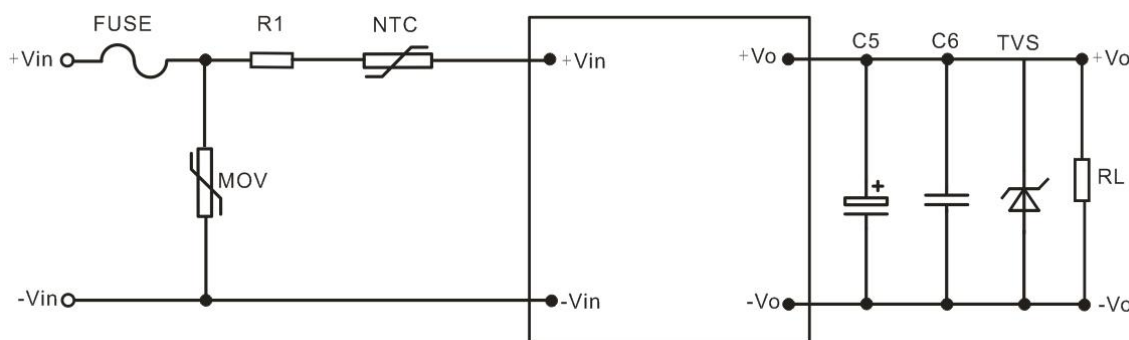


Output Voltage	C5	C6	TVS
5V	680uF/16V	4.7uF/50V/1206	SMBJ10A
12V	470uF/25V	1.0uF/25V/1206	SMBJ15A
15V	330uF/35V	0.2uF/50V/1206	SMBJ18A
24V	220uF/50V	0.1uF/50V/1206	SMBJ28A

Note:
The output filter capacitor C5 is an electrolytic capacitor. It is recommended to use high-frequency, low-resistance electrolytic capacitors. For capacity and flowing current, please refer to the technical specifications provided by each manufacturer. The capacitor voltage is derated by 80%. C6 is a ceramic capacitor to remove high-frequency noise. The TVS tube protects the downstream circuit when the module is abnormal and is recommended to be used.

EMC External Recommended Circuit

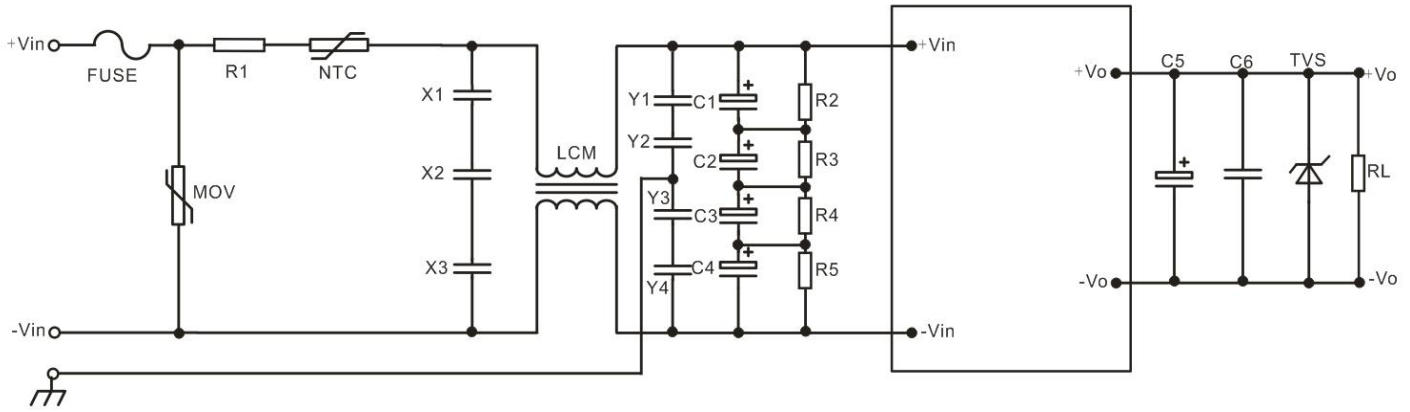

Dimension and Pin out Specifications

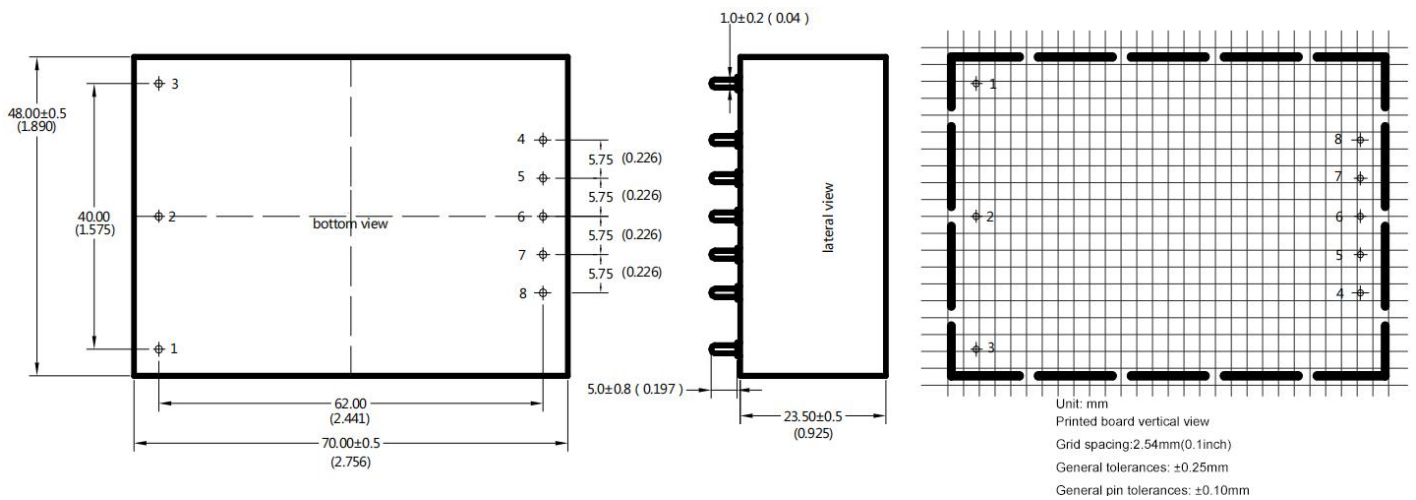

Pin out Specification:

Pin-out	1	2	3	4	5	6	7	8
Single (S)	NC	-Vin	+Vin	+Vo	NC	NC	NC	-Vo

Dimension


Packing code	L x W x H	
H1N4	70.0X48.0X23.5 mm	2.756X1.890X0.925inch

Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)



Test Method:

(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

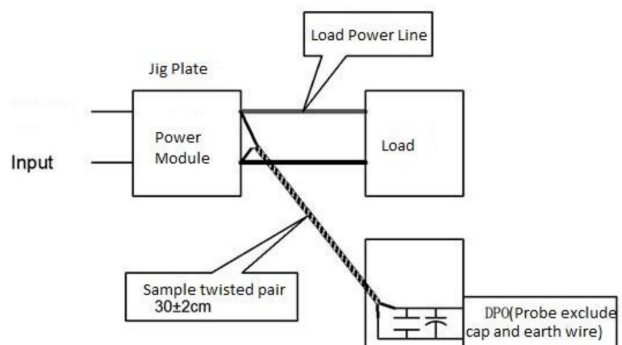

Product Characteristic Curve

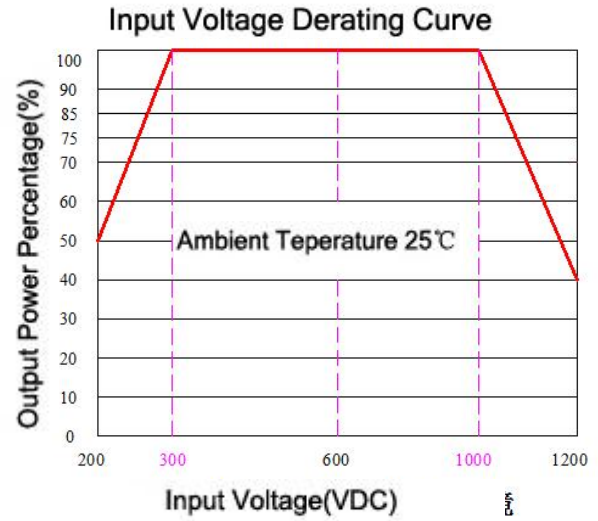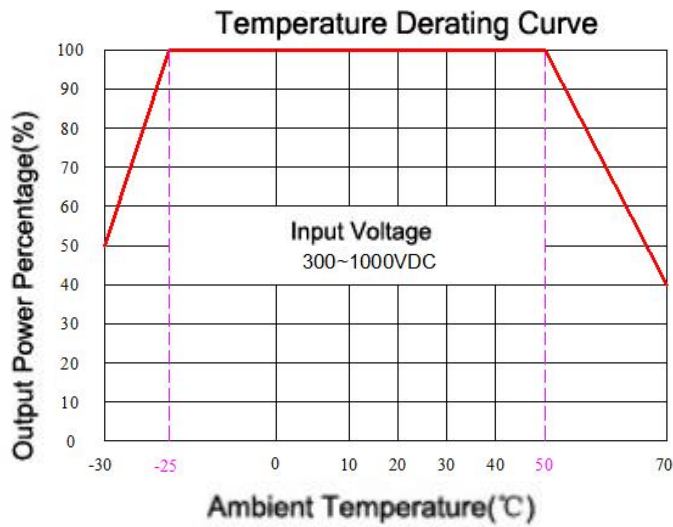

Note:

1. The product should be used under the specification range, otherwise it will cause permanent damage to it.
2. Product's input terminal should connect to fuse;
3. If the product operated below the minimum load request, we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
4. If the product worked beyond the load range, we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
5. Unless otherwise specified, data in this datasheet are tested under conditions of $T_a=25^{\circ}\text{C}$, humidity<75% when inputting nominal voltage and outputting rated load(pure resistance load);
6. All index testing methods in this datasheet are based on our Company's corporate standards.
7. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
8. We can provide customized product service;
9. The product specification may be changed at any time without prior notice.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821

E-mail: sales@aipu-elec.com Website: www.aipupower.com